




Exam Questions 200-150

DCICN Introducing Cisco Data Center Networking

https://certificationstime.com/

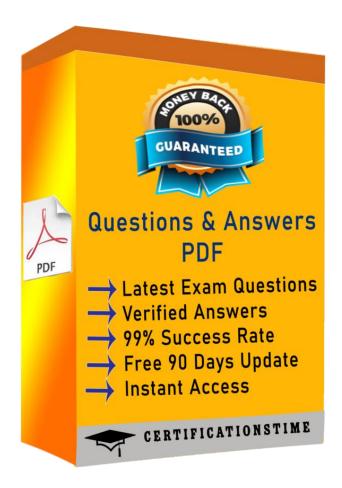



QUESTION 1

When writing new App in Tropo, in what format should the App Script be saved/

- A. .xml
- B. .json
- C. .js
- D. .mp4

Answer: C

QUESTION 2

Which layer of the OSI model is associated with the reliable transmission of datagrams?

- A. Datagram
- B. Routing
- C. Network
- D. Data link
- E. Transport
- F. Transmission
- G. Session

Answer: E Explanation:

http://en.wikipedia.org/wiki/Transport layer

QUESTION 3

Which system users intelligent Audio to cancel out background noise?

- A. DX70
- B. DX80
- C. Spark
- D. Jabber

Answer: B

QUESTION 4

What layer of the OSI Model provides the logical addressing that routers use for path determination?

- A. transport
- B. network
- C. application
- D. presentation

Answer: B

QUESTION 5

Which Cisco UCS power policy mode enables a configuration that can tolerate the loss of an input power circuit?

- A. nonredundatnt
- B. Grid
- C. N+1 in normal mode
- D. N+1 in high-density mode

Answer: B Explanation:

Grid Redundant (N+N) – below: The purpose of the grid redundant mode is to enable a configuration that can tolerate the loss of either a power supply or a input power circuit. In grid-redundant mode the system can withstand the loss of any two power supplies. The Figure 5 shows the required wiringScheme for Grid Redundant power where N=2.

QUESTION 6

Which statement about the HSRP protocol is true?

- A. Multiple routers in an HSRP group are in an active state, to enable round-robin load balancing of traffic
- B. In Cisco NX-O
- C. HSRP is configured to pre-empt by default
- D. HSRP version 2 is an open standard protocol that is described in RFC 2281
- E. One router in an HSRP group is in an active stat
- F. All other routers are in a standby state or listening state

Answer: C

Full Access

https://certificationstime.com/updated/200-150-exam-dumps-pdf/