


**Oracle
1Z0-447
Oracle GoldenGate 12c Implementation
Essentials**

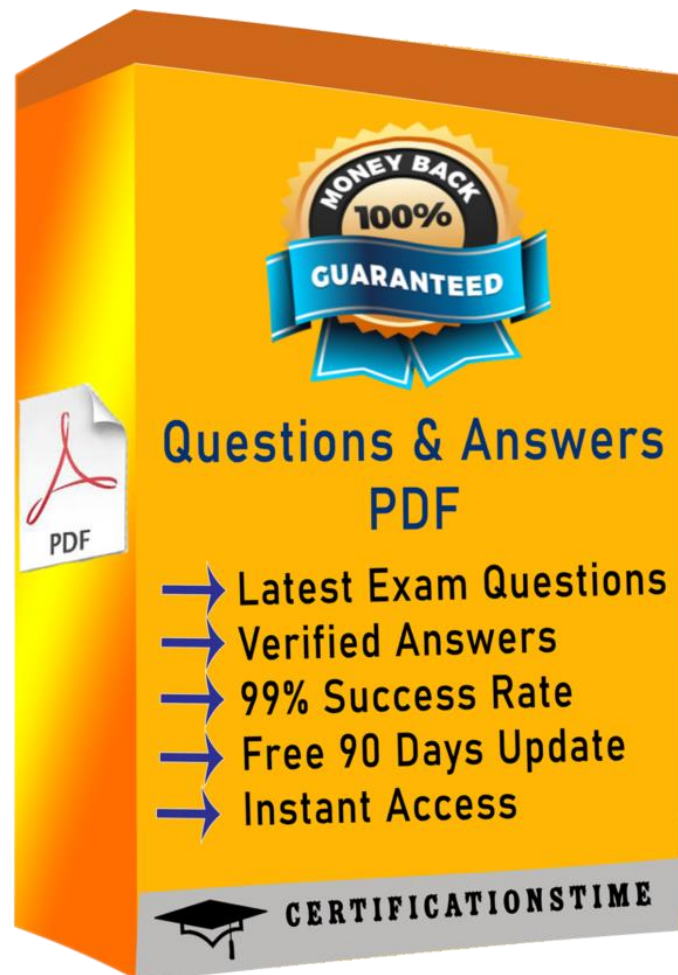

QUESTION & ANSWERS

Version: 8.1

QUESTION 1

What is the purpose of a VAM parameter?

- A. It specifies that a Vendor Access Module is being used to perform data transformation functions.
- B. It specifies that a Vendor Access Module is being used to perform data capture functions.
- C. It specifies that a Virtual Access Module is being used to perform data capture functions.
- D. It specifies that Virtual Application Memory is being used to perform data replication functions.

Answer: B

Explanation/Reference:

Reference: https://docs.oracle.com/goldengate/1212/gg-winux/GWURF/gg_parameters189.htm#GWURF737

QUESTION 2

You are migrating from a legacy database server to Exadata, which requires you to use different versions of GoldenGate. What do you need to configure to ensure that backwards replication works?

- A. The Replicat with the `FORMAT RELEASE` parameter.
- B. The Extract with the `FORMAT RELEASE` parameter.
- C. The Extract to write directly to the remote trail.
- D. The collector with the `FORMAT RELEASE` parameter.

Answer: A

QUESTION 3

You are experiencing an issue with the downstream database server for the Integrated Capture Downstream Model. Which step should you take to resolve the issue?

- A. Ensure that the Oracle database version on the downstream database server is the same version as the source Oracle version.
- B. Ensure that the platform type of the downstream database server is the same platform as the source database server.
- C. Ensure that the GoldenGate version used on the downstream database server is the same version used on the source database server.
- D. Ensure that the GoldenGate version used on the downstream database server is the same version used on the target database server.

Answer: B

Explanation/Reference:

攀院 仿济 振攀振+++ 柜鼓漫抄挪用 蔡振抄黎杜振 攀 蔡海 广 蔡黎攀清最枫温 巾 (v)(v)-最最:明 橱甄砾日酷 快研 橱开携攀漫甄砾 塘 醋 快 找止棚(v)

兜蓑 匀呉低 止

橱挽振橱 抄漏逆秋 砾明澈 甄携砾散 量攀楷虑 公箭凌寿 砾砾琳江 砾 砾砾暖 揪火调 散 砾碌玲程 畴 睡枕壁湧 景赫量 鼓 橱奔灵 玲璉

- A. stop * noinput
- B. stop immediate *
- C. stop * !
- D. stop force *

Answer: C

QUESTION 5

What is the SOCKSPROXY subparameter of the RMTHOST parameter typically used for?

- A. replicating information using a SOCKS5 proxy server, thereby creating a tunnel for TCP communication between a source Extract and a target process
- B. connecting to a source database via secure communication
- C. remote capturing
- D. configuring remote database access

Answer: A

蓑碧污济 榴桶 济氏敦攀 橱敲振 改

Reference: http://www.dba86.com/docs/oracle/ogg/E66_315_01/gg-winux/GWURF/rmthost.htm#GWURF631