


Salesforce
DEV-501
Certified Force.com Advanced Developer

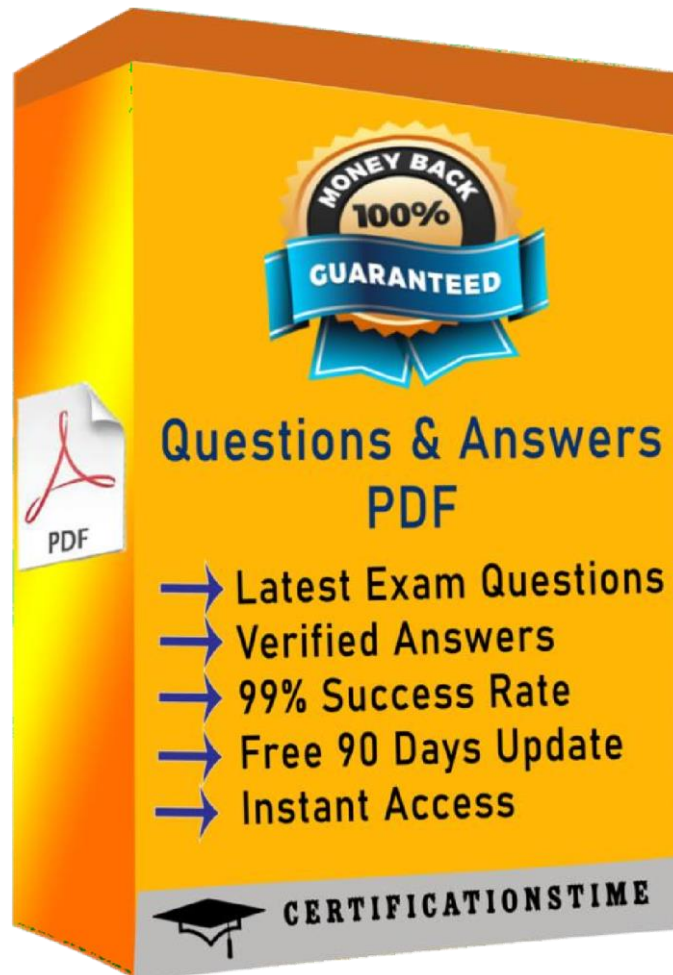

QUESTION & ANSWERS

Salesforce

Exam DEV-501

Certified Force.com Advanced Developer

Verson: Demo

[Total Questions: 10]

Question No : 1

A/an _____ is a class written in Apex that adds to or overrides behavior in a standard or custom controller.

- A. Custom component
- B. Controller extension
- C. Apex extension
- D. Extended Controller
- E. Component extension
- F. None of these

Answer: D

Question No : 2

How can the default profile under which Webservices execute be changed? (No Answer)

- A. with sharing keyword
- B. Webservice
- C. SOQL statements
- D. constructor

Answer: A

Question No : 3

A set of content that is grouped together, rendered with an HTML tag, <div> tag, or neither. Use an <apex:outputPanel> to group components together for AJAX refreshes.

- A. apex:outputPanel
- B. apex:includeScript
- C. apex:chartTips
- D. apex:lineSeries

Answer: A

Question No : 4

A read-only display of a label and value for a field on a Salesforce object. An `<apex:outputField>` component respects the attributes of the associated field, including how it should be displayed to the user. For example, if the specified `<apex:outputField>` component is a currency field, the appropriate currency symbol is displayed. Likewise, if the `<apex:outputField>` component is a lookup field or URL, the value of the field is displayed as a link.

Note that if custom help is defined for the field in Setup, the field must be a child of an `<apex:pageBlock>` or `<apex:pageBlockSectionItem>`, and the Salesforce page header must be displayed for the custom help to appear on your Visualforce page. To override the display of custom help, use the `<apex:outputField>` in the body of an `<apex:pageBlockSectionItem>`.

The Rich Text Area data type can only be used with this component on pages running Salesforce.com API versions greater than 18.0.

- A. `apex:actionRegion`
- B. `apex:actionSupport`
- C. `apex:outputField`
- D. `apex:pageBlock`

Answer: C

Question No : 5

By referring to a page in this way, the platform recognizes that this controller or controller extension is dependent on the existence of the specified page and will prevent the page from being deleted while the controller or extension exists.

- A. True
- B. False

Answer: B

Question No : 6

The `System.runAs()` functionality can be used to test and verify proper data sharing and data access. However, `System.runAs()` does NOT validate CRUD or Field Level Security permissions.

- A. True
- B. False

Answer: B

Question No : 7

An ordered or unordered list of values that is defined by iterating over a set of data. The body of the <apex:dataList> component specifies how a single item should appear in the list. The data set can include up to 1,000 items.

- A. apex:inputText
- B. apex:dataList
- C. apex:lineSeries
- D. apex:inputCheckbox

Answer: B

Question No : 8

A section of a Visualforce page that allows users to enter input and then submit it with an <apex:commandButton> or <apex:commandLink>. The body of the form determines the data that is displayed and the way it is processed. It's a best practice to verify that pages and custom components use at most one <apex:form> tag.

As of API version 18.0, this tag can't be a child component of <apex:repeat>.

- A. apex:form
- B. apex:chart
- C. apex:actionRegion
- D. apex:insert

Answer: A

Question No : 9

What can cross-object formulas reference?

- A. Both parent and child object records
- B. Parent object records only
- C. Child object records only
- D. Other records of the same object

Answer: B

Question No : 10

What types of sharing are available to developers to share records?

- A. Failure response settings
- B. Manual sharing, apex sharing
- C. Dates, Ids, Numbers
- D. Apex, Visualforce, and APIs

Answer: B

